





安利消防器材有限公司 Safety Fire Fighting Equipment Ltd.

消防處註冊消防裝置承辦商 • 機電工程署註冊電業承辦商

www.FIRE.hk |
 safety@fire.hk |
 香港灣仔石水渠街90號地下 G/F., No. 90 Stone Nullah Lane, Wan Chai, HK |
 2866 6895 |
 2866 6795

Beghelli *SELF-CONTAINED EMERGENCY LUMINAIRES*

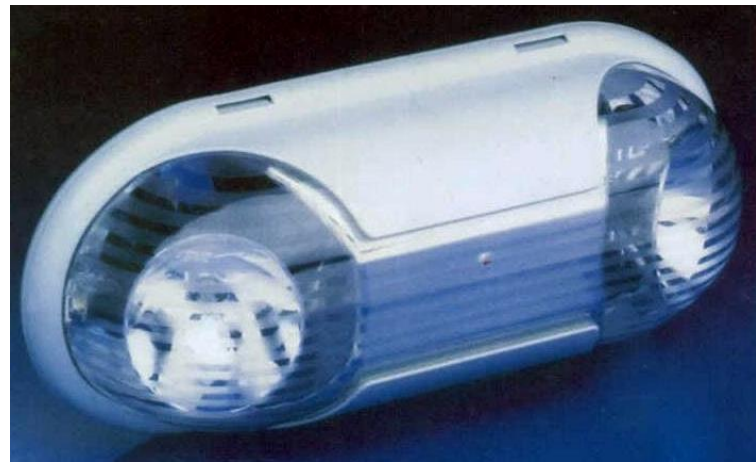

DIMENSIONS (mm)		
A	B	C
430	165	117

Features	Model	1202
<ul style="list-style-type: none"> ✚ Operating Voltage:230V, 50Hz ✚ High capacity rechargeable sealed lead acid battery ✚ Manual test button ✚ Automatic recharge circuit ✚ Overcharge protection circuit with control on the ✚ Minimum battery voltage level ✚ Luminous LED informing on status and power supply ✚ Battery can be charge up within 12 hours ✚ Built with self-extinguishing plastic material conform to ✚ EN60598-1, UL94, temperature resist to 449 °C ✚ Protection degree: IP65 ✚ Insulation class: II ✚ Manufacturing according to European standards EN60598-1, EN60598-2-22 ✚ Warranty of 12 month ✚ Conform to H.K. Fire Services Department Circular: No. 1/2006 Appendix II [PPA/104(A)] Section B ✚ H.K. Electrical & Mechanical Services Department ✚ Certificate awarded by H.K. Safety Institute ✚ Tested by TÜVRheinland, Test Report No. : 140168002 	Rating:	20mA
	Power factor:	0.9
	Halogen bulb:	2x5W, G4
	Lumen output (lm):	2x70
	Required lumen (lm): (EN60598-2-22)	42
	Lumen output (lm): (after 1 minute)	62
	Max. lumen (lm):	118
	Battery type:	Pb 6V 4.5Ah
	Discharge duration:	2 hours
	Weight:	2.3Kg

All photos are for reference only. 圖片只供參考
 All Technical Information is provided by Manufacturer. The Dealer is not held responsible for any inaccuracies in the data.