



安利消防工程有限公司 Safety Fire Engineering Limited

消防處註冊消防裝置承辦商 • 機電工程署註冊電業承辦商



www.FIRE.hk



safety@fire.hk



香港灣仔石水渠街90號地下
G/F., No. 90 Stone Nullah Lane, Wan Chai, HK





2866 6895



2866 6795

緊急後備照明燈 (發光二極管) Automatic Emergency Light (LED)

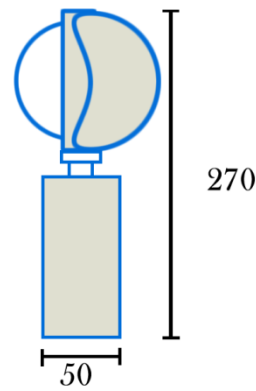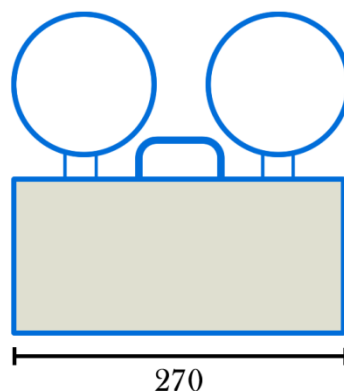

Model No. / 型號	6V3L
Housing / 外殼	金屬材料，外焗塗粉狀樹脂漆油 Metal materials with Epoxy Powder Coating
Head Lamp / 燈頭	防火 ABS 材料，電子線採用 UL1015 Fire Resistant ABS materials, Electric Wire used by UL 1015
Rechargeable Battery / 充電池	Ni-Cd 3.6V 800mAh (full charged within 12 hrs)
Normal Output / 輸出功率	1W (excess 2 meters more than 2 lux)
Inner features / 燈內裝置	防火線路版及 UL 防火電子線 Fire Resistant P.C. Board & UL Fire Resistant Wire
Outside features / 燈外裝置	紅色電源指示燈、綠色充電池指示燈、測試掣及 OFF 掣 "RED" Power indication light, "Green" re-charger battery light, Test switch and "OFF" switch
Discharge Duration/可亮時間	Over 2 Hours
Circuit Design / 線路設計	一份低電壓斷路器，以便於充電池耗盡後將電池截斷 A low voltage cut out to disconnect the battery when fully discharged
Testing Report / 測試證書	China Electric Testing Centre Ltd. DNS#:ELS20100206-001
Testing Standard / 測試標準	香港消防處牌照及審批總區: [PPA/104(A) 第四次修訂] HKFSD Licensing & Certification Command [PPA/104(A) 4 th Revision]
Line Voltage / 電壓	AC 220 - 240V 50 Hz
Weight / 重量	1.50 kg
Dimension / 燈箱尺寸	270 x 270 x 50mm

All photos are for reference only. 圖片只供參考

All Technical Information is provided by Manufacturer. The Dealer is not held responsible for any inaccuracies in the data.